




# DRCW

## DOUBLE ROW

### HARD MATERIALS

## 300 Trade

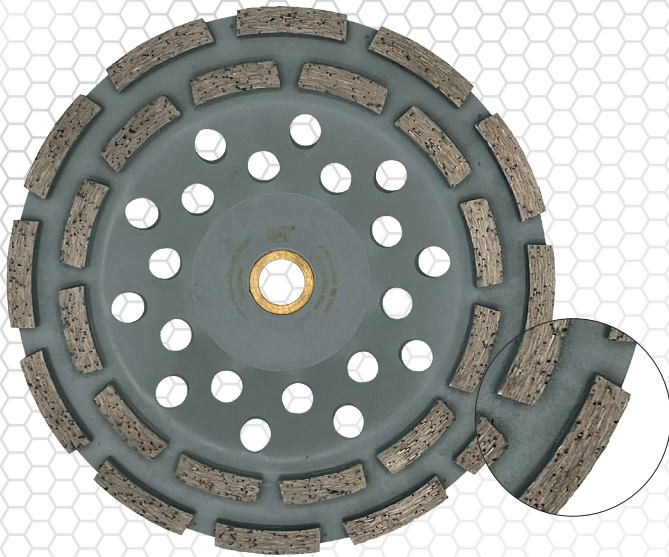

Cat® 300 Trade double row cup wheels are engineered for economical grinding of lips & ridges to make a flat surface. Designed to be used with angle grinders. The product is engineered with a premium fast medium aggressive bond with medium 30 / 40 # mesh diamond grit. Manufactured from a single heavy duty fully ground steel core for strength & eliminates torque & open air ducting enables cooler operation providing faster stock removal & faster grinding. The perfect choice for the enthusiast / occasional user & those medium size jobs for users that want a good life & grinding speed.

#### ATTRIBUTES

- FAST AGGRESSIVE ACTION
- FAST STOCK REMOVAL
- HIGH DIAMOND CONCENTRATION 30 / 40 # MESH GRIT
- BALANCED FOR LESS VIBRATION.

#### APPLICATION

★★★★	CRITICALLY HARD AGGREGATE CONCRETE (FLINT, CHERT), HARD TO MEDIUM AGGREGATE CONCRETE (CHERT - TRAP ROCK - RIVER GRAVEL), MEDIUM AGGREGATE CONCRETE (TRAPROCK - QUARTZ), MEDIUM SOFT AGGREGATE CONCRETE (GRANITE - LIMESTONE), CONCRETE CURBS, CONCRETE SLABS, HARD LIMESTONE, LIMESTONE AGGREGATE CONCRETE, CONCRETE PAVERS, CONCRETE PIPE, SOFT FACING BRICKS, CONCRETE ROOF TILE, SOFT FACING BRICKS, CONCRETE WITH MEDIUM SHARP SAND, CONCRETE SCREED, PLASTER - GROUT.
★★★	GRANITE, QUARTZITE, CLASS A ENGINEERING BRICK 125 N/MM², CLASS A ENGINEERING BRICK 125 N/MM², REFRACTORY BRICK, HARD FACING BRICK, TRAVERTINE, PORPHYRY, CLASS B ENGINEERING BRICK 75N/MM², MEDIUM FACING BRICK, HARD SLATE, RIVER GRAVEL CONCRETE, LIGHT REINFORCED CONCRETE, BASALT, LIGHT REINFORCED CONCRETE LINTELS, FIBER CEMENT BOARD, CONCRETE BLOCKS OVER 15N/MM², HARD SANDSTONE (FINE GRIT), SOFT SLATE, MARBLE, MEDIUM SANDSTONE (MEDIUM GRIT).
★★	INDIAN STONE (KOTA), SOFT SANDSTONE (COARSE GRIT), CONCRETE BLOCK UNDER 15N/MM².
★	GREEN CONCRETE UNIVERSAL, GREEN CONCRETE WITH VERY HARD AGGREGATE, GREEN CONCRETE WITH MEDIUM HARD AGGREGATE, GREEN CONCRETE WITH MEDIUM SOFT AGGREGATE, LIGNACITE BLOCKS, LAVA ROCK, PUMICE.



DRY GRINDING



WET GRINDING

<b>HARD CONCRETE</b>  AGREGADO DURO	<b>SCREED</b>  CAPA DE MORTERO	<b>HARD STONE</b>  PIEDRA DURA
<b>CONCRETE SLABS</b>  HOJAS DE HORMIGON	<b>PLASTER</b>  YESO	<b>BRICKS</b>  LADRILLOS

PRODUCT		DIAMETER		SEGMENT HEIGHT		SEGMENT WIDTH		MAIN ARBOR - BORE		REDUCING RINGS INCLUDED		MACHINES USED
PART NO	CODE NO	MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH	
DA36008	DRCW100US	100	4	5	0.197	8	0.315	N/A	5/8" 11 Thread	N/A	N/A	
DA36009	DRCW115US	115	4 1/2	5	0.197	8	0.315	N/A	5/8" 11 Thread	N/A	N/A	
DA36010	DRCW125US	125	5	5	0.197	8	0.315	N/A	5/8" 11 Thread	N/A	N/A	
DA36011	DRCW180US	180	7	5	0.197	8	0.315	N/A	5/8" 11 Thread	N/A	N/A	
DA36012	DRCW100EU	100	4	5	0.197	8	0.315	22.23	7/8	22.23 - 15.88	7/8 - 5/8	
DA36013	DRCW115EU	115	4 1/2	5	0.197	7	0.276	22.23	7/8	22.23 - 15.88	7/8 - 5/8	
DA36014	DRCW125EU	125	5	5	0.197	7	0.276	22.23	7/8	22.23 - 15.88	7/8 - 5/8	
DA36015	DRCW180EU	180	7	5	0.197	8	0.315	22.23	7/8	22.23 - 15.88	7/8 - 5/8	



**WARNING:** This product can expose you to "Nickel" which is known to the State of California to cause cancer & birth defects.  
**ADVERTENCIA:** Este producto puede exponerlo a un "Níquel" que el Estado de California sabe que causa cáncer y defectos de nacimiento.  
**AVERTISSEMENT:** ce produit peut vous exposer à un "Nickel" connu de l'Etat de Californie pour provoquer le cancer et des malformations congénitales. [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)



©2023 Caterpillar. All Rights Reserved. CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, "Caterpillar Corporate Yellow", the "Power Edge" & Cat "Modern Hex" trade dress as well as corporate & product identity used herein, are trademarks of Caterpillar & may not be used without permission. C6 DIAMOND LLC, a licensee of Caterpillar Inc.

**SILICA DUST:** Workers who are exposed to respirable crystalline silica dust are at increased risk of developing serious silica-related diseases. It is necessary to use saws & other machinery that is equipped with an integrated water delivery system that continuously feeds water to the blade. Operate & maintain all tools in accordance with manufacturer's instructions to minimize dust emissions & always wear the correct ventilator. For more info visit: [www.osha.gov/sites/default/files/publications/OSHA3681.pdf](http://www.osha.gov/sites/default/files/publications/OSHA3681.pdf)